


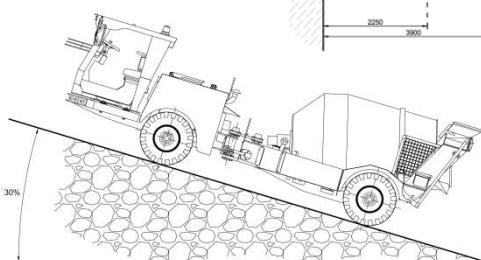






Transmixer **Huron 2** is the answer to the request of a strong scissor-lift platform for low-profile tunnels which accomplishes all safety regulations. Its great mobility, small dimensions, working capacity, easy-to-use and the proven reliability of our equipment, give it unique features in the market.

Its special configuration, with articulated chassis, its engine and its design, provides the strength and flexibility to work under the most extreme conditions, from extreme cold to tropical temperatures.

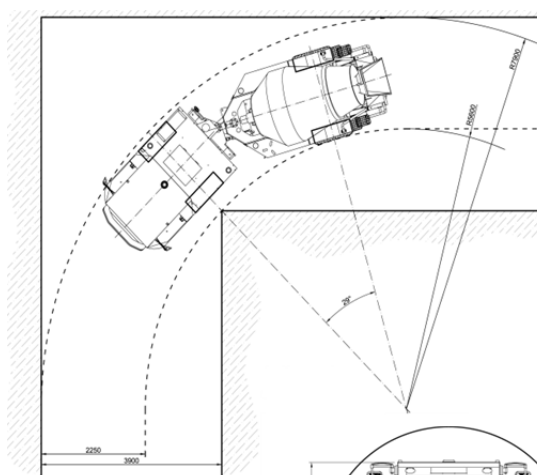

Transmixer **Huron 2** is equipped with all the elements to make easy a hard work: **Rotary driving place, ROPS-FOPS cabin, working lights, especial designed drum for transporting and mixing at the same time. A full accessibility to high rotation components,** make its use and maintenance not a loss of time, but, using it properly, the reason for a long-lasting and reliable unit. The powerful engine allows it to work **without loss of power up to 5,000 MASL** and to overcome slopes up to 30% full load.

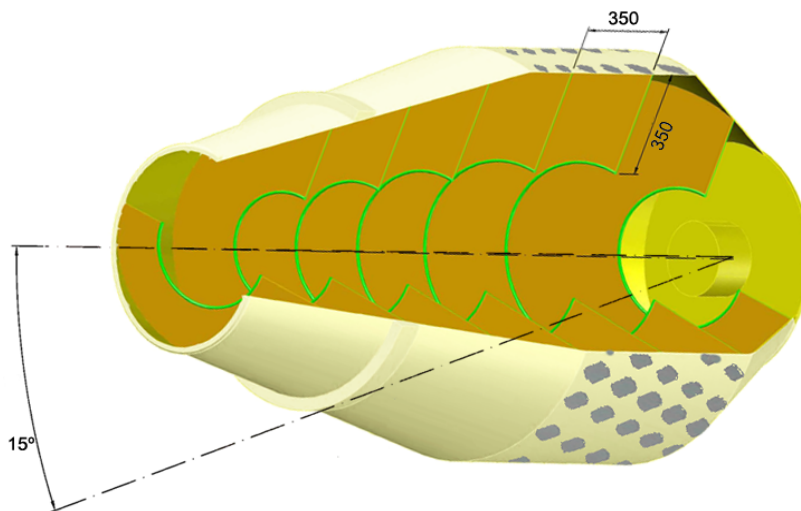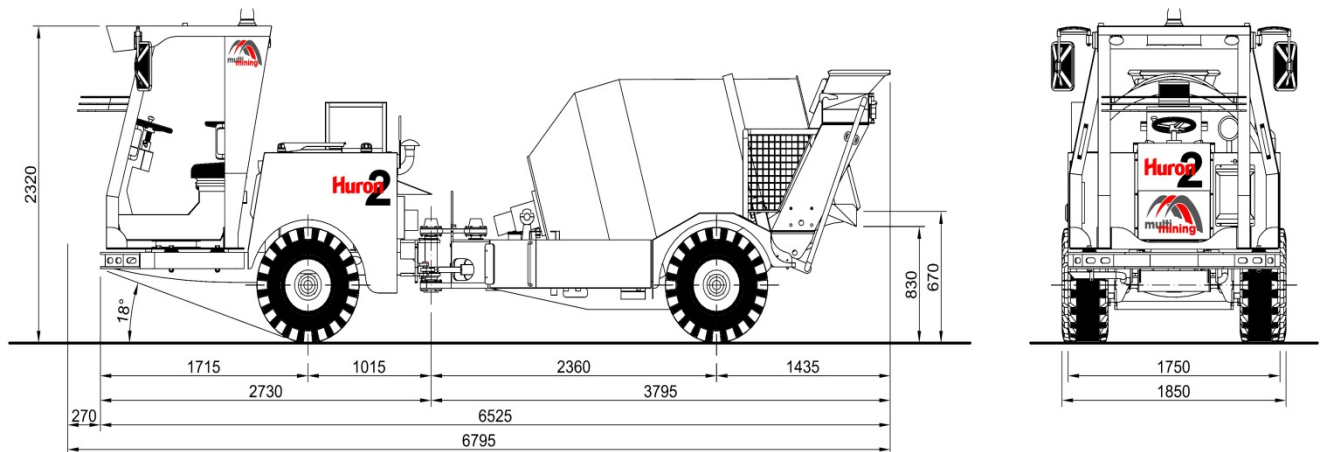

The special internal design of the mixer allows the unit a mixture of dry mass, pouring the water from its own tanks for producing the concrete, or ready wet mix, giving unique smooth finishing features in its sector.

The unit has 2m³ output capacity of concrete, incorporating hydraulic drum cover as standard to avoid any loss during transport.



EASY TO TRANSPORT

In this global world, forwarding equipment in a fast and safe way has become a need and an obligatory feature. The use of trailers and containers help to deliver **Huron 2** anywhere in the world.



BRAND		MULTIMINING
MODEL		HURON 2
OUTPUT CAPACITY		2 m³
DRUM CAPACITY		2,900 LITRES
MOTOR	BRAND	DEUTZ
	MODEL	TD 2011 L04I
	COOLING	AIR-OIL
	NORMATIVE	TIER III (COM III)
	POWER	(74.5 CV) 54.7 KW / 2,600 R.P.M.
	TYPE	TURBO INTERCOOLER
TRANSMISSION	TYPE	HYDROSTATIC
	GEARS	3 GEARS FORWARD AND REVERSE
HYDRAULIC CIRCUITS	DRUM ROTATION	HYDRAULIC WITH AUTOMATIC REGULATION OF R.P.M.
	SHIFT	HYDRISTATIC
	SERVICES	GEARS PUMP
AXLE		4 MOTOR-WHEELS
DRIVE		4-WHEELS
STEERING		HYDROSTATIC ON CENTRAL JOINT
DRIVER'S SEAT		ROTATORY 180º
CABIN		FRONT AND OPEN
		ROPS - FOPS
BRAKES	SERVICE	HYDRAULIC ON ALL 4 MOTOR-WHEELS
	PARKING	NEGATIVE HYDRAULIC ACT. ON ALL 4 MOTOR-WHEELS
DIMENSIONS		6,815mm *1,850mm *2,300mm
DRUM		DOUBLE BLADE
STEERING RADIOUS	INNER	5,600mm
	OUTTER	7,900mm
POURING CHUTE		OPTIONAL
HYDRAULIC SHIELD ON DRUM		STANDARD FROM FACTORY
SPEED		0 A 20 KM/H ACCORDING TO SPANISH RULES
MAXIMUM SLOPE		30%
ELECTRICAL SYSTEM		2 BATTERIES OF 12V, 110 AH
POURING		REAR
POURING HEIGHT		855mm - 965mm
TYRES		12 - 16.5 RIM 9.75 - 16.5
WEIGHT		4,840 KGS.
HYDRAULIC OIL TANK		290 L
WATER TANK		245 L
FUEL TANK		195 L
WATER PUMP		100 L/MIN FLOW
		SUCTION HOSE WITH SPRINKLER AND FILTER
		WASHING HOSE AND LITER COUNTER
HIGH PRESSURE WASHING		100 BAR

Due to the constant process of improvement at factory, all data are subject to modification without prior notice, being merely illustrative all data in this catalogue.

MADRID: Ctra de Valencia, Km 19,200. 28524 RIVAS VACIAMADRID (MADRID). FAX: +34916701005. e-mail:madrid@mlorenzana.com

LEÓN: Pol. Ind. Villacedré. 24009 VILLACEDRÉ (LEÓN). FAX: +34987849036. e-mail:leon@mlorenzana.com

www.mlorenzana.com +34 902 151 236



Hiron
2

