





SILMATIC





The monoblock silos **SILMATIO** stem from traditional silos, sharing the same shape and dimensions. The difference is their three legs and the Support base for the instrument of automatic control.






Together with our portable concrete plant and our self-loading concrete mixers they make up a semi-portable plant for producing concrete in the place and moment you need


The electronic weighing system with digital panel, and controlled by automatic programs, allows us to discharge the preselected amount of cement, as well as showing the total amount of cement remaining in the silo or the amount that we introduced in it.



SILMATIC

SILMATIC

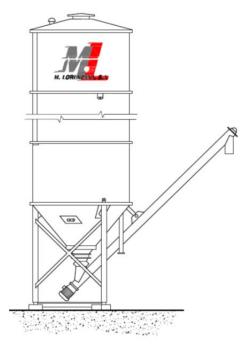



The 99-recipes-memory allows us to schedule the suitable amount of cement for each mixture, depending on the type of concrete resistance that we need, or allows us the schedule for different mixers' capacities.

All silos can be equipped with an additional device for allowing the discharge of materials scheduled by timer.

Optionals:

- Dust collector filter.
- Remote control.
- Fluidization system











SPECIFICATIONS	15/DE	22/DE	29/DE	36/DE	45/DE	55/DE
CAPACITY	15 m3	22 m3	29 m3	36 m3	45 m3	55 m3
STORAGE CAPACITY	~20 Ton	~30 Ton	~40 Ton	~50 Ton	~63 Ton	~77 Ton
SCREW CONVEYOR DISCHARGE HEIGHT	4.2 m					
SCREW CONVEYOR CAPACITY	20 m3/h					
ABSORBED POWER	5.7 kW					
THREE-PHASE POWER	380V - 50 Hz					
TRANSPORT DIAMETER	Ø 2.45 m	Ø 2.45 m	Ø 2.45 m	Ø 2.45 m	Ø 3 m	Ø 3 m
TRANSPORT LENGHT	6.3 m	7.8 m	9.4 m	10.9	9.7 m	11.2 m
WEIGHT	2,000 kg	2,300 kg	2,600 m	3,000 kg	3,900 kg	4,200 kg



Due to the constant process of improvement at factory, all data are subject to modification without prior notice, being merely illustrative all data in this catalogue.

MADRID: Ctra de Valencia, Km 19,200. 28524 RIVAS VACIAMADRID (MADRID). FAX: +34916701005. e-mail:madrid@mlorenzana.com







