



PREMIER - 5









Self-loading concrete mixer **Premier 2**, due to its tubular structure, combines flexibility and robustness.

Its features make it the actual reference in its sector, mainly because of:

- The speed and quality of mixture
- The big capacity of the loading shovel
- The big capacity of the tanks
 - Water
 - Fuel
 - Hydraulic oil
- Rops-Fops cabin, placed in the loading area for a better visibility of the operator.
- It avoids useless stops optimizing duty time and thus the efficiency.
- Engine accomplishing TIER III standard.
- 270° Rotation of drum and hydraulic lifting of it for pouring aid.
- Handling and controls inside the cabin and by the drum

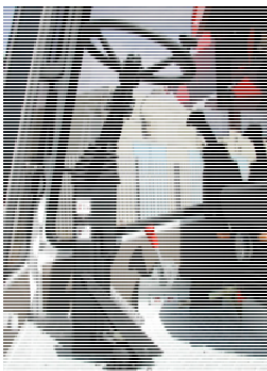


Among other options, we offer **electronic weighing system with printer.**

Also optional:

- **Heated cabin / Air Conditioned**
- **Higher pouring**
- **Rotatory cabin**
- **“Extreme cold” modified unit.**

PREMIER - 5

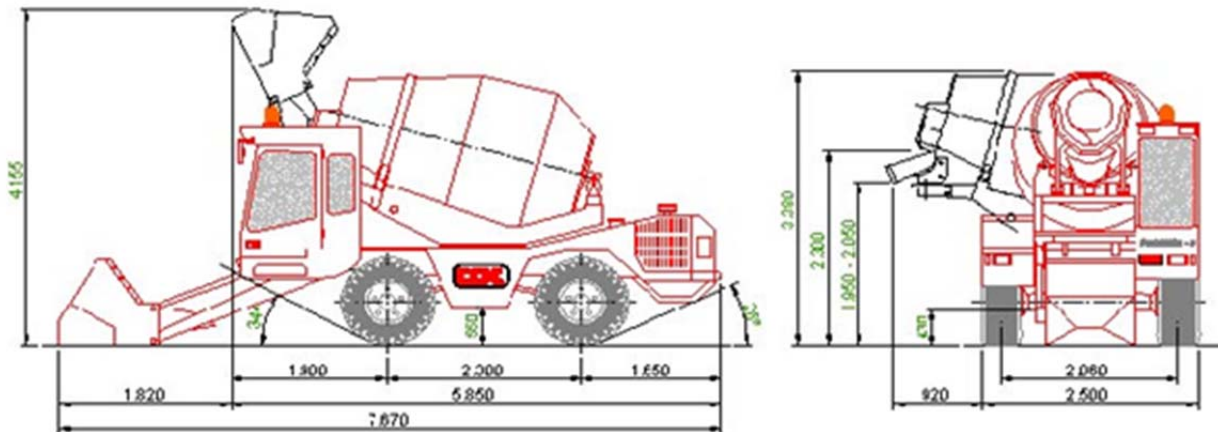

SMALL DIMENSIONS, BIG FEATURES

The unit is made for working under the worst conditions with the best and most advanced features in technology and safety.



EASY TO TRANSPORT

In this global world, forwarding equipment in a fast and safe way has become a need an obligatory feature. **Premier 5** has been designed for being shipped in containers or by Ro-Ro service, which can be delivered anywhere in the world.

Our "Premier" equipment is working in such different places as Angola, México, Dominican Republic, Russia, Brazil, Italy ... No need of more introductions; It is the answer to your requirements in civil Works with no doubt.



BRAND		C.O.C.
MODEL		PREMIER-5
OUTPUT CAPACITY		4m ³
DRUM CAPACITY		5,100 Lit
MOTOR	BRAND	PERKINS
	MODEL	1104D-E44TA
	COOLING	WATER
	POWER	140CV AT 2,200 R.P.M.
TRANSMISSION	TYPE	HYDROSTATIC
	GEARS	2 GEARS FORWARD AND REVERSE
AXLES		MONOBLOCK
AXLE CAPACITY		10,000 KGS
DRIVE		4-WHEEL
CABIN		FRONT, CLOSED
		JOYSTICK
		ROPS - FOPS
STEERING	TYPE	HYDRO-ASSISTED
	FRONT AXLE	YES
	CRAB STEERING	YES
	REAR AXLE	YES
HYDRAULIC CIRCUITS	SHIFT	HYDROSTATIC DA SYSTEM
	DRUM ROTATION	HYDROSTATIC ELECTRICAL REGULATION
	BRAKES	GEAR PUMP
	STEERING & SERVICES	GEAR PUMP
		"SELF-CONTROL" DEVICE
BRAKES	SERVICES	OIL BATHER INNER DISCS ON 4 WHEELS
	PARKING	OIL BATHER INNER DISCS ON REAR AXLE
DIMENSIONS		7,670 mm*2,500 mm*3,380 mm
DRUM		DOUBLE BLADE
DRUM MOVEMENT		270º
STEERING RADIOS	INNER	1,200 mm
	OUTTER	4,700 mm
POURING CHUTE		SWIVELLING AND ADJUSTABLE
CYCLE		7 - 10 MIN
SPEED	WORKING	0 TO 8 KM/H
	SHIFTING	20 KM/H ACCORDING TO SPANISH RULES
MAXIMUM SLOPE		30%
ELECTRICAL SYSTEM		12 V BATTERY
POURING		270º
POURING HEIGHT		2,000 mm - 2,350 mm
TYRES		18-19.5 MPT02
WEIGHT		8,500 Kg
HYDRAULIC OIL TANK		200 Lit
WATER TANK		1,125 Lit
FUEL TANK		100 Lit
SHOVEL CAPACITY		750 Lit

Due to the constant process of improvement at factory, all data are subject to modification without prior notice, being merely illustrative all data in this catalogue.

MADRID: Ctra de Valencia, Km 19,200. 28524 RIVAS VACIAMADRID (MADRID). FAX: +34916701005. e-mail:madrid@mlorenzana.com

LEÓN: Pol. Ind. Villacedré. 24009 VILLACEDRÉ (LEÓN). FAX: +34987849036. e-mail:leon@mlorenzana.com

www.mlorenzana.com +34 902 151 236



PREMIER - 5



REF CAT: 00.AU.P5.13.EN.02