



HURON-45

General Features

Length	7200 mm
Width	2150 mm
High	2600 mm
Ground clearance	355 mm
Axle distance	3400 mm
Maximum slope in running order	30%
Maximum inclination in running order	25%
Inner turning radius	2595 mm
External turning radius	5725 mm
Weight	11.000 Kg
Mixing capacity	4,5 m ³
Vat capacity	5100 lt
Cover with tank locking cap	Yes

Diesel engine

Brand	Caterpillar
Model	C7,0
Power	129 kW (173 CV)
Emissions	TIER 3

Diesel engine

Brand	Caterpillar
Model	C7,1
Power	129 kW (173 CV)
Emissions	Stage V

Transmisión

Type	Powershift
Brand	JCB
Speeds	4
Drive	4 WD
Theoretical maximum speeds at full loaded	
1st Speed	4 Km/h
2st Speed	8 Km/h
3st Speed	14 Km/h
4st Speed	25 Km/h
Theoretical maximum reverse speeds:	
1st Speed	4 Km/h
2st Speed	6 Km/h
3st Speed	14 Km/h
4st Speed	20 Km/h

Steering

Type	Hydro-assisted
Actuation	2 axes
	Front axle
Possibilities	2 axes
	Crab

Brakes

Service (Oil bath)	Multidisc
Actuation	4 wheels
Parking	Negative
Actuation	4 wheels

Cabin

Certification	ROPS / FOPS
Tipo	Closed
Air conditioning	Cold / Heat
Driving position	Reversible 180º
Driver's seat	With belt
Rear camera	Yes

Water pump Washing

Maximum pressure	228 bar
Flow rate	16,8 l/min

Capacities

Diesel Tank (Aluminum)	215 lit
Hydraulic Tank (Aluminum)	215 lit
Water tank (Aluminum)	330 lit

Other

Tyres	12.00 R 20
-------	------------

Fire suppression

Dafo	Dust
------	------

Grease

Centralised	Automatic
-------------	-----------



Non-binding information document. Values are theoretical values. Specifications subject to change without notice.

H45-2025I

HURON-45

Vat Drive	
Type	Hydrostatic
Electrical regulation	0 a + 22 r.p.m

OPTIONAL EQUIPMENT
Aditive pump
Aditive tank

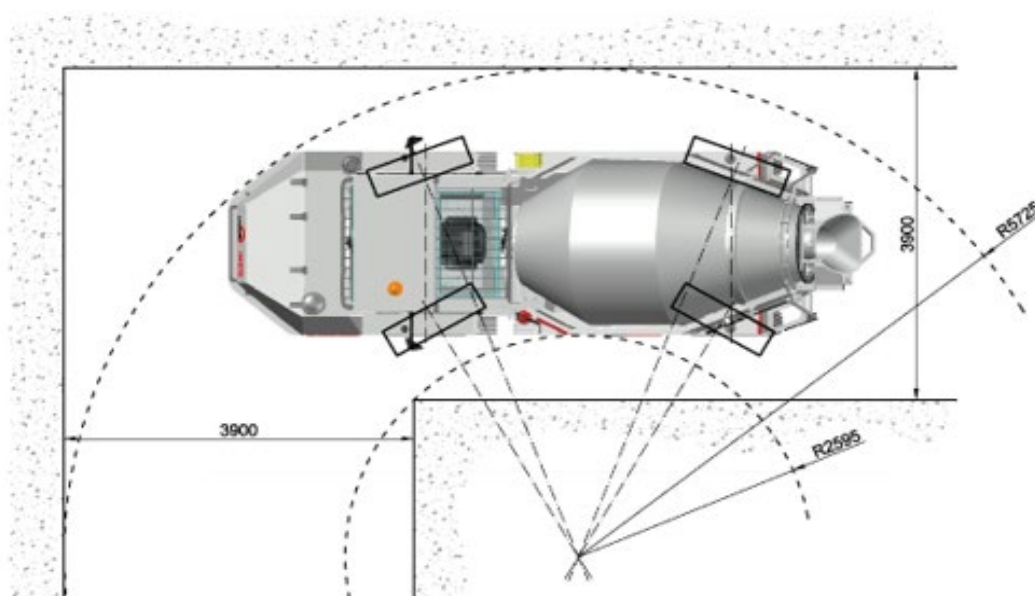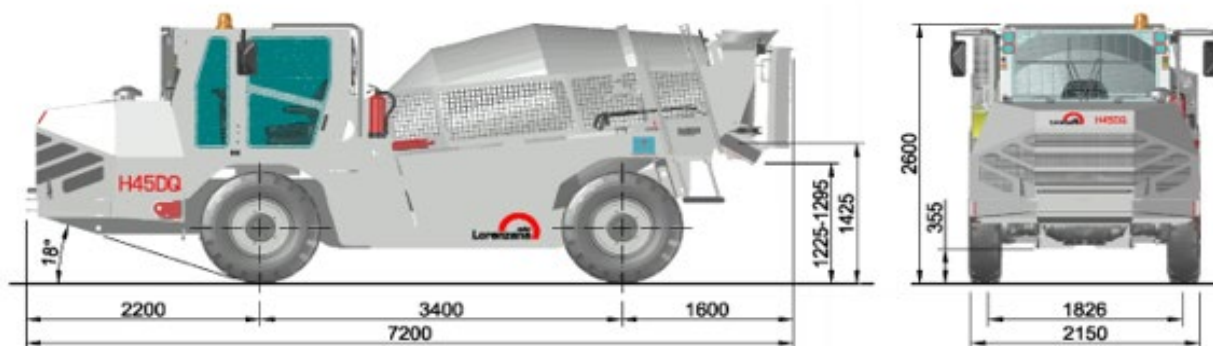

Non-binding information document. Values are theoretical values. Specifications subject to change without notice.

H45-2025I